


XCITING 500 AFI WIRING DIAGRAM



(1) USE 4-5A (RED) FUSE FOR STOP WORK ACTIVE STARTER POSITION SENSOR
 (2) USE 2-5A (ORANGE) FUSE FOR STOP WORK ACTIVE PERMANENT PROTECTOR SENSOR
 (3) USE 1-5A (RED) FUSE FOR STOP WORK ACTIVE HEAD LAMP (LOCK) FUSE

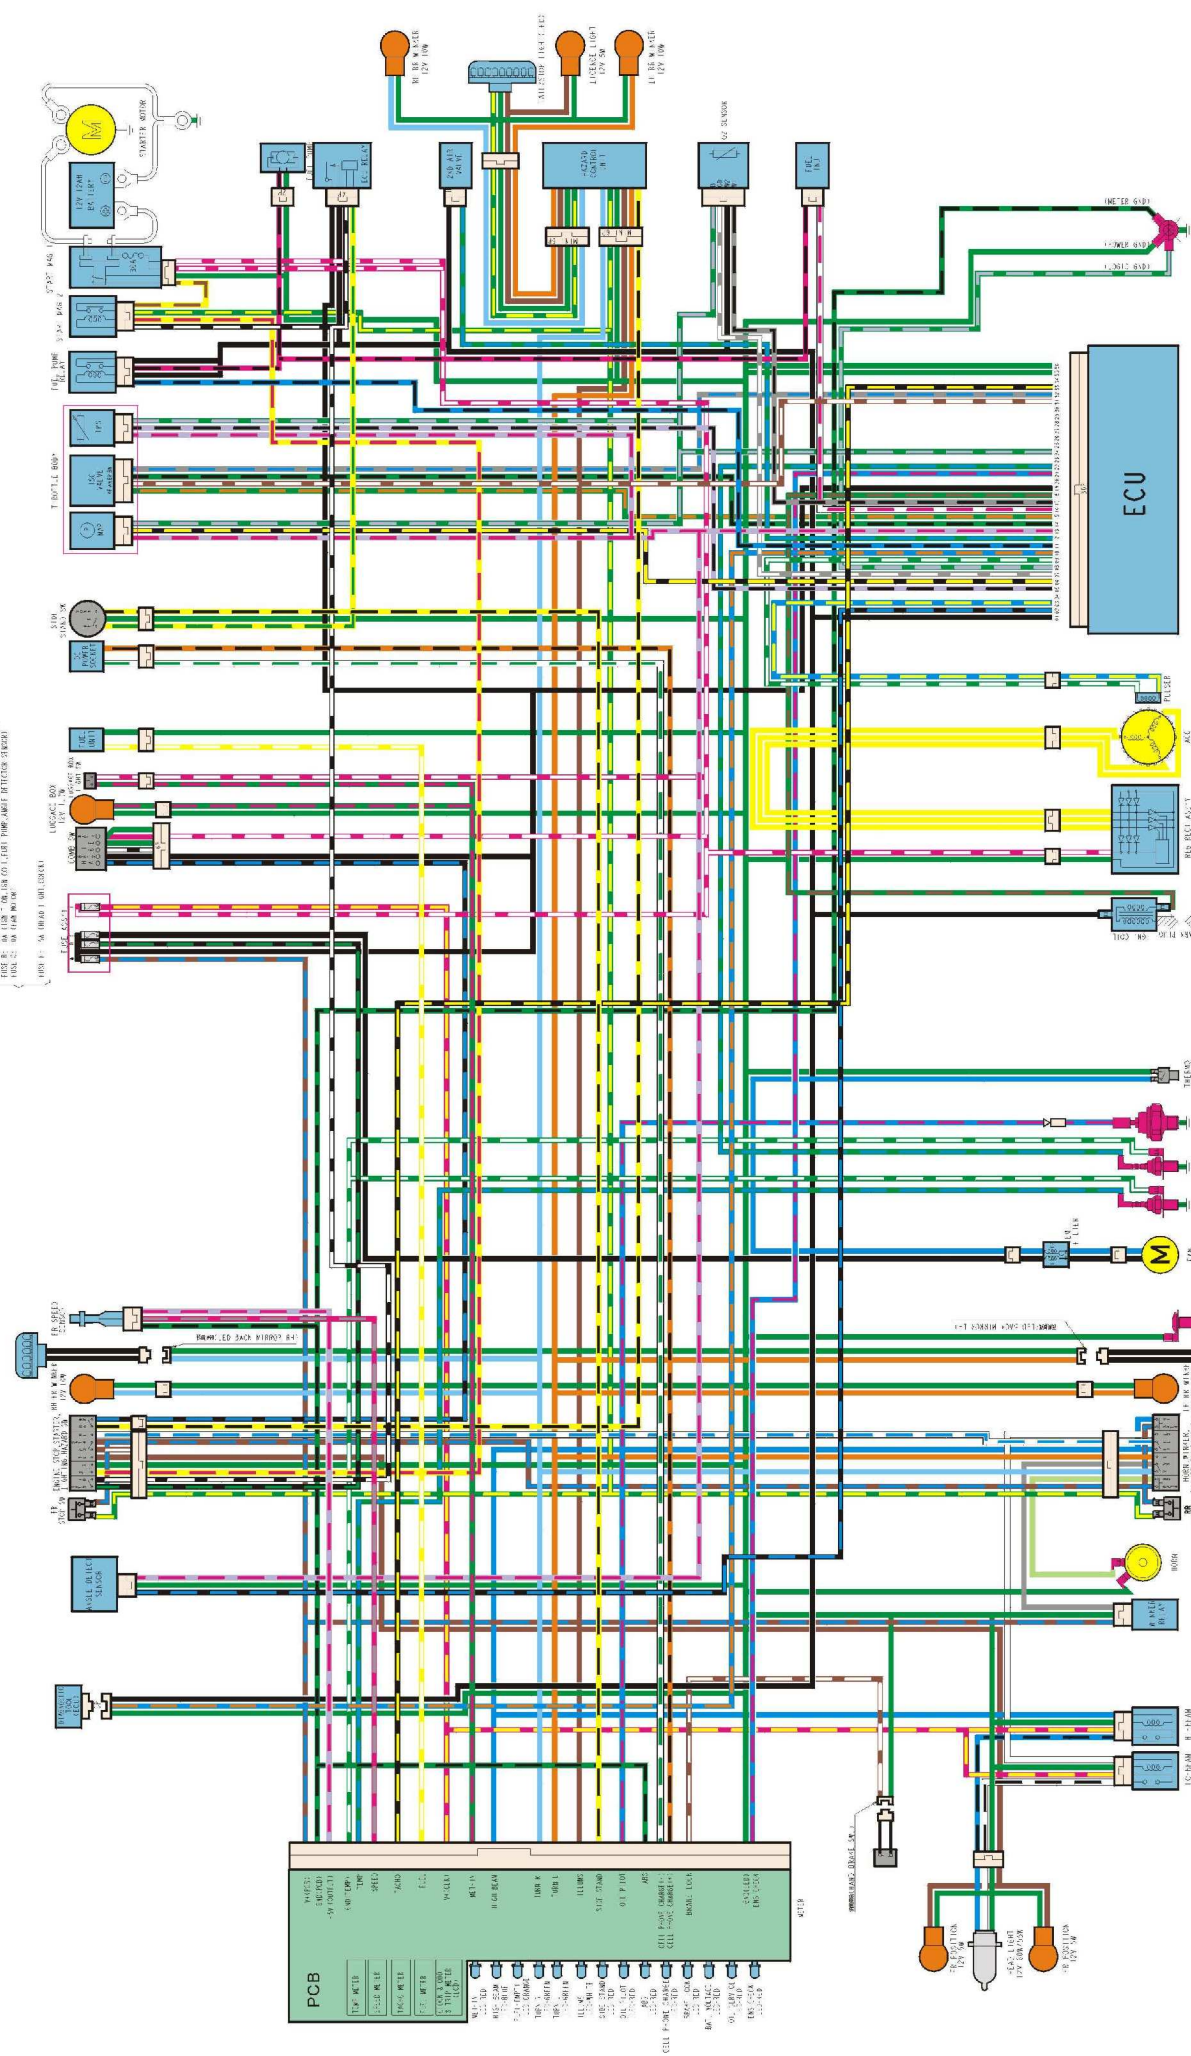

WIRING NO.	WIRING NAME	WIRING COLOR	WIRING NO.	WIRING NAME	WIRING COLOR
1	IGNITION SWITCH	RED	1	IGNITION SWITCH	RED
2	IGNITION SWITCH	RED	2	IGNITION SWITCH	RED
3	IGNITION SWITCH	RED	3	IGNITION SWITCH	RED
4	IGNITION SWITCH	RED	4	IGNITION SWITCH	RED
5	IGNITION SWITCH	RED	5	IGNITION SWITCH	RED
6	IGNITION SWITCH	RED	6	IGNITION SWITCH	RED
7	IGNITION SWITCH	RED	7	IGNITION SWITCH	RED
8	IGNITION SWITCH	RED	8	IGNITION SWITCH	RED
9	IGNITION SWITCH	RED	9	IGNITION SWITCH	RED
10	IGNITION SWITCH	RED	10	IGNITION SWITCH	RED
11	IGNITION SWITCH	RED	11	IGNITION SWITCH	RED
12	IGNITION SWITCH	RED	12	IGNITION SWITCH	RED
13	IGNITION SWITCH	RED	13	IGNITION SWITCH	RED
14	IGNITION SWITCH	RED	14	IGNITION SWITCH	RED
15	IGNITION SWITCH	RED	15	IGNITION SWITCH	RED
16	IGNITION SWITCH	RED	16	IGNITION SWITCH	RED
17	IGNITION SWITCH	RED	17	IGNITION SWITCH	RED
18	IGNITION SWITCH	RED	18	IGNITION SWITCH	RED
19	IGNITION SWITCH	RED	19	IGNITION SWITCH	RED
20	IGNITION SWITCH	RED	20	IGNITION SWITCH	RED

